

# GOT710-837



10.4" SVGA TFT LCD Railway Fanless Touchscreen Panel PC with Intel® Atom™ Processor E3845 1.91 GHz (-40°C to +70°C)

## Features

- Sunlight readable 10.4" SVGA TFT LCD with 1000 nits of brightness
- Intel® Atom™ processor E3845 1.91 GHz
- Alternative keypad control in the front bezel
- M12-type lockable connectors design
- Auto-dimming for different environments
- -40°C to +70°C wide temperature range
- EN 50155, EN 45545-2 certified for railway application



▲ Side view

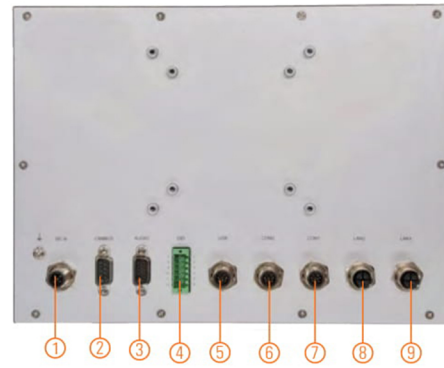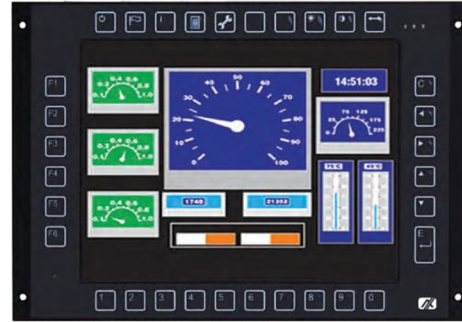

1. DC power input with isolation 1.5kV
2. CANbus with isolation 1.5kV
3. Audio (line-in, mic-in, speaker-out or line-out)
4. DIO (6-in/2-out with isolation 1.5kV)
5. 2 x USB 2.0
6. 1 x RS-232/422/485 with isolation 1.5kV
7. 1 x RS-232/422/485 with isolation 1.5kV
8. 1 x GbE with isolation 1.5kV
9. 1 x GbE with isolation 1.5kV



## Introduction

The EN 50155 certified, GOT710-837 is equipped with a 10.4-inch SVGA TFT LCD with high brightness LED backlight (1000 nits), which allows a train operator to easily read any operational status messages, even under direct sunlight. Design for ease of use and maintenance, this all-in-one 10.4" railway touchscreen panel PC also has an alternative keypad control on the front bezel for easy access and cleaning purposes. This feature-rich panel PC has an IP65-rated, M12 connectors and is EN 50155 certified.

### Wide Temperature (-40°C to +70°C)

The Intel® Atom™-based railway panel PC, GOT710-837, applies unique extended temperature technology with wide temperature range support as well as fanless operation. It also has a high brightness TFT LCD display and compact design for transport heavy-duty environment.

### Designed for Railway Application

The Axiomtek GOT710-837 is particularly suitable for demanding HMI applications in the railway sector, including tasks like monitoring and controlling as speed, temperature, and security, or for fleet management. To ensure the reliable operation in a variety of different locations, the 10.4-inch railway panel PC supports various mounting options: panel mount, wall mount, VESA arm and desktop stand. Moreover, it is also ready for Windows® 10, 8 and 7.

## Specifications

Front Bezel	IP65, NEMA 4 rugged protection, aluminum front bezel, rest area of enclosure is IP40 rated
LCD Panel	Display Type 10.4" TFT LCD
	Brightness (cd/m <sup>2</sup> ) 1000 nits
	Resolution 800 x 600
	Viewing Angle (H/V) 160°/160°
Main System	CPU Intel® Atom™ processor E3845 1.91 GHz (Bay Trail)
	Chipset SoC integrated
	System Memory DDR3L 4GB onboard
	BIOS AMI
	Storage 16GB flash onboard 1 x mSATA
	Watchdog Timer 255 levels, 1 to 255 seconds
	Onboard Graphics Integrated in Intel® GFX

## Specifications

I/O Connector	2 x Isolated M12 A-coded RS-232/422/485 (isolation level 1.5kV) 2 x isolated M12 X-coded GbE (isolation level 1.5kV) 1 x M12 A-coded USB 2.0 (2 port signal) 1 x M12 A-coded DC-in 1 x DB15 audio line-in, mic-in, speaker-out or line-out 1 x Isolated terminal block DIO (6-in/2-out, isolation level 1.5kV) 1 x Isolated DB9 CANbus (isolation level 1.5kV)
Expansion Interface	2 x PCI Express Mini Card slot
Touchscreen	5-wire resistive touchscreen with or without keyboard
Power Supply	Typical 24 to 110 VDC, working range 16.8 to 137.5 VDC
Power Consumption	24-110V@1.4-0.29A
Dimensions	310 mm (12.20") (W) x 51.5 mm (2.03") (D) x 214 mm (8.43") (H) (Excluding connectors and fixation dimensions, please refer to below drawing to get more details)
Packing Dimensions	392 mm (15.43") (W) x 195 mm (7.68") (D) x 447 mm (17.60") (H)
Weight (net/gross)	2.5kg (5.51 lb)/4.3kg (9.48lb)
Operating Temperature	-40°C to +70°C (-40°F to +158°F)
Relative Humidity	10% to 95% @ +40°C, non-condensing
Certifications	CE, EN 50155, EN 50121-3-2, EN 61373, EN 45545-2, UIC-612(keypads) complied

\* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

## Packing List

1 x GOT710-837 unit  
1 x Phoenix connector

## Optional EOS Installation

WES 7

Windows® 10 (IoT)

## Ordering Information

### 24 to 110 VDC Power Input

GOT710-837-R-E3845-24-110VDC (P/N: TBA)	10.4" SVGA railway fanless touchscreen panel PC with Intel® Atom® E3845, sunlight readable LCD (1000 nits), 5-wire resistive touchscreen, 24 to 110 VDC power input
GOT710-837-R-E3845-24-110VDC with keypad (P/N: TBA)	10.4" SVGA railway fanless touchscreen panel PC with Intel® Atom® E3845, sunlight readable LCD (1000 nits), 5-wire resistive touchscreen, 24 to 110 VDC power input and keypad

\*Specifications and certifications may vary based on different requirements.

## Optional Accessories

822B7100140E	GOT710 3G+GPS kit
8812B7100A0E	GOT710 Wi-Fi Kit
594B8122820E	M12 A-coded USB cable
594B7102100E	RS-232 cable
594B7102700E	M12 X-coded LAN cable
594B7100B00E	M12 DC-in power cable with ACC signal, length 1.8M

## Optional OS Installation

Windows® 7

Windows® 8.1

Windows® 10



▲ Touch without keypad version

## Dimensions

