
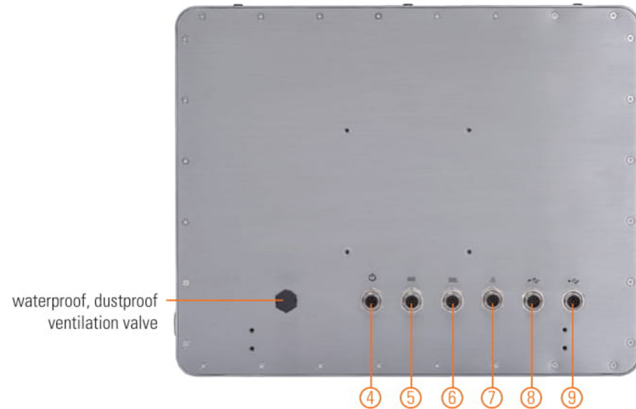


GOT817-834

17" SXGA TFT IP66 & IP69K-rated Stainless Steel Fanless PCT (or Resistive Touch) Panel Computer with Intel® Atom® Processor E3827 and Flat Bezel Design (-20°C to +55°C)

Features

- 17" SXGA TFT LCD flat bezel projected capacitive (or resistive) touch
- IP66/IP69K-rated (NEMA 4X) water/dust/corrosion-proof design
- Full stainless steel enclosure with type 316
- -20°C to +55°C wide operating temperature range
- Fanless system with Intel® Atom® processor E3827
- Optional Wi-Fi/3G kit for wireless network connectivity
- 12 to 36 VDC wide range power input
- M12 type I/O connectors for harsh environments

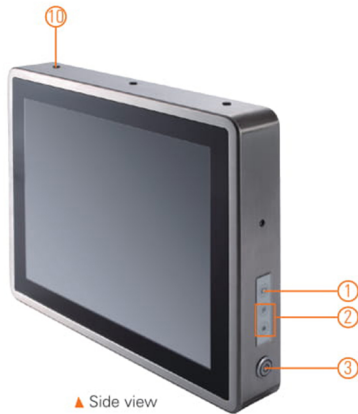

1. Backlight switch
2. Brightness adjust
3. Power on/off
4. DC power connector
5. 1 x RS-232/422/485
6. 1 x RS-232/422/485
7. 1 x LAN
8. 2 x USB 2.0
9. 2 x USB 2.0
10. 3 x Wi-Fi/3G antenna (optional, only for RF version)

Introduction

The 17-inch GOT817-834 is specially designed for food processing applications. Its IP66-rated stainless steel housing protects entire system from damage of water, powder and dust. It also supports a wide operating temperature range from -20°C to +55°C. Thus, this robust unit is specifically designed for high humidity, dusty or wet spaces in food factories or kitchens and more harsh applications.

Full IP66 and IP69K Compliance

The GOT817-834 adopts a water/dust-proof housing design with five IP66-rated M12 I/O connectors and IP69K compliance that ensures the product's ability to resist ingress of high temperature and high pressure water. It passed entire system IP66 test by SGS, and verified salt mist test. Additionally, it was tested by a spray nozzle with high temperature water (+80°C), a flow rate of 14 to 16 L/min and a nozzle hold with distance 10 to 15 cm away from the device at angles of 0°, 30°, 60° and 90° for 30 seconds. The outstanding GOT817-834 stainless touch panel PC is qualified to meet harsh environment applications.

Wide Temp. (-20°C to +55°C) & Anti-vibration (2G) Design

The rugged 17" industrial stainless touch panel PC featuring fanless and noiseless design supports a wide operating temperature range from -20°C to +55°C. Besides, the patent of anti-vibration for SSD ensures system reliability and stability.

Specifications

| | | |
|-------------|---------------------------------|--|
| Enclosure | Stainless type 316 | |
| LCD Panel | Display Type | 17" SXGA TFT LCD |
| | Brightness (cd/m ²) | 350 nits |
| | Resolution | 1280 x 1024 |
| | Viewing Angle (H/V) | 160°/140° |
| Main System | CPU | Intel® Atom® processor E3827 1.75 GHz (Bay Trail) |
| | Chipset | SoC integrated |
| | System Memory | 1 x 204-pin DDR3L-1333 SO-DIMM dual channel, up to 8GB |
| | BIOS | AMI with Axiomtek standard features, such as SmartView, Ethernet Boot ROM (RPL & PXE), customer CMOS backup |
| | Storage | 1 x 2.5" SSD 1 x CFast™ |
| | Watchdog Timer | 255 levels, 1 to 255 sec. |
| | Onboard Graphics | Integrated in Intel® GFX |

Specifications

| | |
|-----------------------|--|
| I/O Connector | 2 x RS-232/422/485 (default RS-232, A-coded) 4 x USB 2.0 (A-coded) 1 x 10/100/1000 Mbps Ethernet (X-coded) 1 x DC power connector (M12) |
| Expansion Interface | 2 x PCI Express Mini Card slot |
| Touchscreen | 5-wire resistive touch or projected capacitive multi-touch |
| Power Input | 12 to 36 VDC |
| Power Consumption | 50W |
| Dimensions | 415.92 mm (16.37") (W) x 54.96 mm (2.16") (D) x 348.34 mm (13.71") (H) |
| Packing Dimensions | 615 mm (24.2") (W) x 250 mm (9.84") (D) x 585 mm (23") (H) |
| Weight (net/gross) | 7.04 kg (15.52 lb)/10.3 kg (22.71 lb) |
| Operating Temperature | -20°C to +55°C (-4°F to +131°F) |
| Relative Humidity | 10% - 95% @ +40°C, non-condensing |
| Operation Vibration | 2G, 5 - 500Hz, random for 2.5" SSD 2G, 5 - 500Hz, random for CFast™ |
| Certifications | CE |

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Packing List

1 x GOT817-834
1 x Driver DVD
1 x DC cable

Ordering Information

Sunlight readable type

| | |
|--------------------------------------|--|
| GOT817-834-C-DC (P/N: E22B817103) | 17" SXGA fanless IP66 & IP69K-rated stainless steel touch panel computer with Intel® Atom® E3827, projected capacitive touch screen, flat-bezel design and 12 to 36 VDC power input |
| GOT817-834-R-DC (P/N: E22B817101) | 17" SXGA fanless IP66 & IP69K-rated stainless steel touch panel computer with Intel® Atom® E3827, 5-wire flat resistive touch screen, flat-bezel design and 12 to 36 VDC power input |

* Other configuration by request

* Specification and certifications may vary based on different requirements

Optional Accessories

| | |
|--------------|---|
| 594B8122100E | Water-proof COM cable (1.8 m) |
| 594B8122820E | Water-proof USB cable (1.8 m) |
| 594B8152710E | Water-proof LAN cable (1.8 m) |
| 50966224010E | Adapter 24V 90W, M12 A-code 5P FSP090AAAAN3 |

Optional EOS Installation

WES 7

WE8S

Windows® 10 IoT

Optional OS Installation

Windows® 7

Windows® 8/8.1

Windows® 10

Dimensions

