


P1197E-861

19" SXGA TFT Expandable Industrial Touch Panel Computer with 3rd/2nd Gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® Processor, 1 PCI or 1 PCIe Slot

Features

- 19" SXGA TFT LCD display
- LGA1155 socket 3rd/2nd gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor
- Intel® H61 chipset
- Less screw design for easy installation
- 6 USB 2.0, 2 USB 2.0 and 4 COM ports
- One PCIe x4 or one PCIe expansion slots
- Built-in speakers and optional Wi-Fi 802.11 b/g/n module
- Robust aluminum with IP65 compliant front bezel design

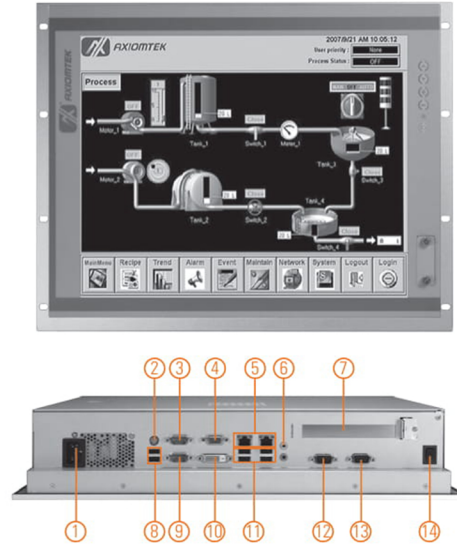

- | | | |
|-------------------------------|----------------------------|--------------------|
| 1. AC Plug | 6. Audio (Mic-in/Line-out) | 11. USB 2.0 x 4 |
| 2. PS2 keyboard & mouse combo | 7. 1 x PCIe x4 or 1 x PCI | 12. COM 3 (RS-232) |
| 3. COM 1 (RS-232/422/485) | 8. USB 2.0 x 2 | 13. COM 4 (RS-232) |
| 4. VGA x 1 | 9. COM 2 (RS-232) | 14. Power switch |
| 5. Ethernet x 2 | 10. DVI-D x 1 | |



Introduction

The P1197E-861 is a multimedia 19" touch panel PC for kiosk application. It has a fashionable mechanism design and industrial-grade material front bezel which can avoid damage from chemical corrosion. To meet the demands of multimedia application, the P1197E-861 is powered by a high performance LGA1155 socket 3rd & 2nd generation Intel® Core™ processor with the Intel® H61 Express chipset. It features four COM ports, two Gigabit Ethernet and up to 16GB memory of dual-channel DDR3 that delivers high computing capability for high performance-demanding applications. The industrial touch panel PC is most suitable for kiosk, factory and automation.

Expandable for 1 PCIe or 1 PCI

The P1197E-861 has 1 PCIe x4 or 1 PCI slot for expansion purpose. User can easily plug in standard half-size PCI or PCIe card based on any application needs.

Speaker and WLAN Antenna Supported

The P1197E-861 features built-in speakers for kiosk application to display multimedia content program. It also supports WLAN module antenna (optional) for wireless network connectivity.

SATA HDD Trays for Easy Maintenance

Without the complicated steps, users can maintain hard drive in 2 steps that make the work more efficiency.

Friendly Less Screw Design

The P1197E-861 is designed with ease of maintenance in mind. There are only three screws on the back chassis, so that technicians can quickly remove the system's back cover with minimum effort.

Specifications

Front Bezel	Aluminum w/ IP65/NEMA 4 rugged protection	
LCD Panel	Display Type	19" SXGA TFT LCD
	Brightness	350 nits
	Resolution	1280 x 1024 pixels
	Viewing Angle	170°/160°
Main System	CPU	LGA1155 socket 3rd/2nd generation Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor
	Chipset	Intel® H61
	System Memory	2 x 204-pin DDR3-1333/1600 SO-DIMM, up to 16GB
	BIOS	AMI UEFI BIOS with OA 3.0 built
	Storage	2 x 2.5" 7/9.5 mm SATA HDD
	Drive	1 x built-in slim DVD-RW (optional)
	Watchdog Timer	255 levels, 1 ~ 255 sec.

Updated Apr. 12, 2018. * All specifications and photos are subject to change without notice.

Specifications

IO Connector	3 x RS-232 (COM 2-4) 1 x RS-232/422/485 (COM 1) 1 x DVI-D 1 x VGA 6 x USB 2.0 (back) 2 x USB 2.0 (front) 2 x 10/100/1000 Mbps Ethernet (Realtek RTL8111E) 1 x Audio (Mic-in/Line-out) 1 x PS/2 keyboard & mouse combo
Expansion Interface	1 x PCIe x4 or 1 x PCI
Touchscreen	5-wire resistive type Light transmission 79% 1 million activations (typical) at a single point
Power Supply	100 ~ 240 VAC, 270 W
Power Consumption	162 W
Dimensions	469 mm (18.46") (W) x 94.7 mm (3.73") (D) x 380.8 mm (14.99") (H)
Packing Dimension	615 mm (24.21") (W) x 250 mm (9.84") (D) x 585 mm (23.03") (H)
Weight(net/gross)	8 kg (17.64 lb)/ 10.4 kg (22.93 lb)
Environment	Operating temperature: 0°C ~ +45°C (+32°F ~ +113°F) Relative humidity: 10% ~ 90% @ 40°C, non-considering Operating vibration: 1.0G, 5-500Hz, random
Certificate	CE

Ordering Information

P1197E-861 w/ PCIe	19" SXGA expandable industrial touch panel computer with LGA1155 socket 3rd & 2nd generation Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor, resistive touch screen and 1 PCIe x4 slot, 100 ~ 240 VAC
P1197E-861 w/ PCI	19" SXGA expandable industrial touch panel computer with LGA1155 socket 3rd & 2nd generation Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor, resistive touch screen and 1 PCI slot, 100 ~ 240 VAC

* Specification and certifications are based on requirements and may vary.

Optional Accessories

82211970060E	DVD-RW kit
82211970070E	VESA & wall mount kit
82231870240E	Wireless LAN kit
E981604011	ATC10 (VESA arm clamp type)
E981604012	ATW10 (VESA arm wall mount)


Optional OS Installation

Windows® XP/XPe
Windows® 7/8.1
Windows® Embedded 7/8



▲ Less screw design

Dimensions

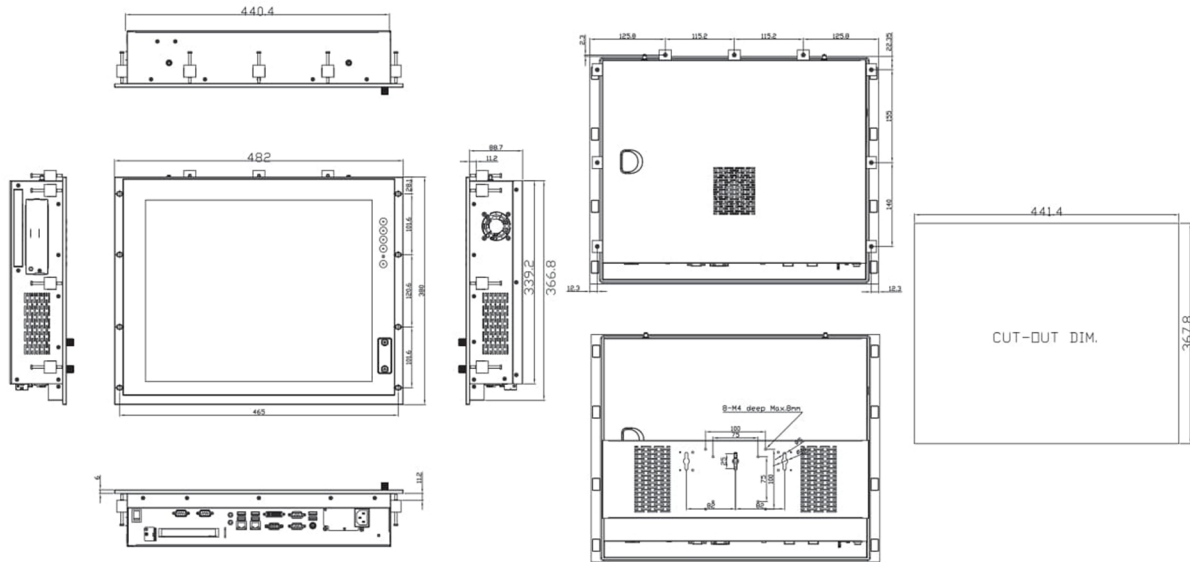

* All specifications and photos are subject to change without notice.