

WINDOW DISPLAY

HIGH TEMPERATURE & BRIGHTNESS SCREEN

CLASS	MODEL
55"	D551MLH

KEY FEATURES

- Special DOOH LCD Panel
- High Temperature Endurance up to 105°C
- 2300 nits High Brightness
- Prevents Blackouts
- 178° Wide Viewing Angle
- Auto Brightness Sensor Control
- Time On/Off Setting
- Remote Control (RS232)



Broadcast your branding with HYUNDAI Digital Signage!

According to the advanced product design, Hyundai Digital Signage Display meets necessary requirements for various digital signage solutions. Hyundai Digital Signage can be installed in any format such as portrait, landscape, single, multi and built-in delivering clear and bright images.



SPECIFICATIONS

Model	D551MLH	
Panel	Screen Size (diagonal)	55"
	Active Display Area (inch/mm)	47.62 x 26.79 / 1209.6 x 680.4
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Display Colors	16.7M
	Brightness (cd/m ² ; typ.)	2300
	Contrast Ratio	1300:1
	Response Time (ms; GTG)	10
	Viewing Angle	178°/178°
	Lifetime (hours)	30,000
	Backlight type	LED
Resolution	Monitor	1920 x 1080
	DTV	1080p
Input	Video	1x VGA (D-Sub) 1x HDMI
	Audio	1x PC Audio 1x RS232C
Output	Video	1x VGA (D-Sub) 1x DVI (HDMI connector) 1x RS232C
	Audio	Speaker (ready)
Output	Video	1x VGA (D-Sub) 1x DVI 1x RS232C
	Audio	Speaker (ready)
Power	Input Voltage	100 – 240V AC
	Power consumption	530 W
Features	Auto Cooling System	yes
	Auto Power Control (DPMS)	yes
	Tempered Glass	option
	Anti Reflection Coating	option
	Touch Screen	option
	Transflective	option
	Auto Brightness Sensor	yes
	Operation	Temperature (°C)
	Humidity (%)	20 - 80
	OSD Language	10 Lang
Dimension	Set (W x H x D), inch/mm	29.91 x 50.74 x 4.94 / 759.8 x 1289 x 125.5 (Portrait)
Bezel Size (U/D/L/R), inch mm		1.48/1.48/1.48/1.48 37.7/37.7/37.7/37.7
Wall Mounting (WxH), mm		400 x 600
Weight	Set (lb/kg)	134.48 / 61

FEATURES

Special Out-Of-Home LCD Panel

By using commercial grade LCD panels for Out-Of-Home applications, the HYUNDAI Digital Signage display can provide a higher brightness and contrast than standard LCD TV panels. Our LCD panel enables to operate for longer working time, deliver clear and bright image contents in the portrait or landscape format without any loss of quality.

High Brightness & Contrast


Achieving a brightness up to 2300 cd/m² and working with a smart dynamic contrast technology, the special Out-Of-Home panels ensure bright and sharp pictures with a facsimile depth, even in bright enlightened environments.

High - Temperature Panel

HYUNDAI's new high - temperature panel is ready to operate in conditions of up to 105°C. This prevents so called "blackout", caused by overheating, and makes it suitable for installation sites which are characterized by high temperature, bright ambience and direct sun light.

DIMENSIONS

D551MLH [unit: mm]

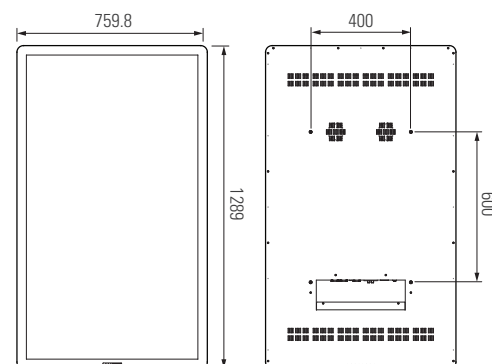

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE; SEP. 2012

HEAD OFFICE - HYUNDAI IBT CO., LTD.

106, Apogongdan-gil, Gimche on-si, Gyeongsangbuk-do, 740-862 The Republic of Korea
Tel. +82 54 430 6426 E-mail: prio123@hyundaiibt.com
www.hyundaiibt.com

HYUNDAI IT AMERICA CORP.

2051 Junction AVE., Suite 112 San Jose, CA 95131, USA
Tel. +1 408 954 8920 email : sales@hyundaita.com
www.hyundait.com

HYUNDAI IT EUROPE GMBH

Siemensstrasse 22, 63225 Langen, Germany
Tel. +49(0) 6103-38878-100 email : info@hyundait.eu
www.hyundait.eu

HYUNDAI IT JAPAN

Sunbridge Ogawamachi Bldg 4F, 2-2 Ogawamachi Kanda Chiyoda-Ku, Tokyo, Japan
Tel. +81 3 5259 7645 email : oysk@hyundait.com
www.hyundait.jp